SENFENG


www.senfenglaser.com

# Laser Blanking Lines

## BOLT Series

Max thickness of coiled steel: 0.3-1.2mm
Working area: 2500*1300mm

- Full-process automation from decoiling, leveling, cutting, bending to unloading
- Self-developed intelligent bus-based CNC system taking integrated control of key components
- Work with panel bender featured by press-down arm and universal bending tools, to bend into dozens of shapes
- Adopt plate flipping & unloading robots to reduce manual intervention and speed up production
- Users can adjust or reconfigure all modules as needed, without overhauling the entire line

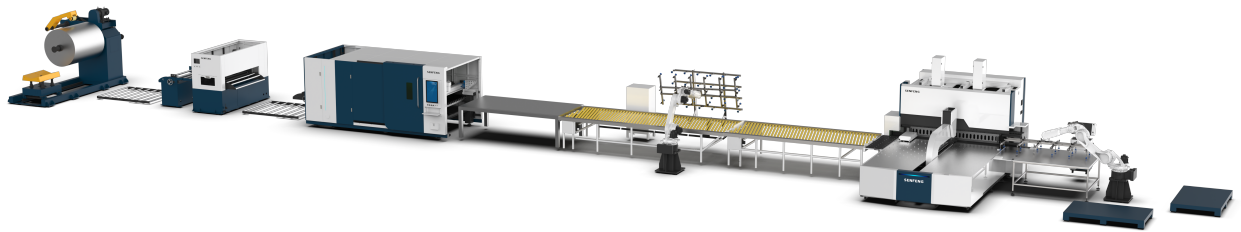

| Model | H4 (Ultra-high Power Series) |
|---|---|
| Laser Power (kW) | 30-80 |
| Working Area (L*W, mm) | 6100*2530/8100*2530/12050*2530 |
| X/Y-axis Positioning Accuracy (mm) | ±0.05 |
| X/Y-axis Repositioning Accuracy (mm) | ±0.02 |
| Max No-load Speed (m/min) | 200 |
| Max Acceleration (G) | 2 |
| Max Load of Platforms (kg) | 9000/12000/16000/18860 |
| Overall Dimensions (L*W*H, mm) | 14734*3781*2410/15960*4233*3000/19005*3781*2410/20190*4233*3000/27770*3781*2410 |
| Power Supply | Three-phase 380V, 50Hz/60Hz (custom-made) |

+86 188 5315 8301 senfeng@sfcnclaser.com