SENFENG

www.senfenglaserusa.com

1530G

Laser power: **1.5-6kW**
Sheet thickness: **0.04-0.79 in**

- Stable cutting of ≤0.79 in thick sheet at low to medium power
- Intelligent bus-based CNC system taking integrated control of core components and offering various cutting processes
- Fully-enclosed autofocus laser cutting head, with less pollution and longer service life
- Keep workshop clean by using protective chamber and intelligent zoning smoke exhaust system
- Easy to load and unload sheets quickly on its sidewise push-pull platform

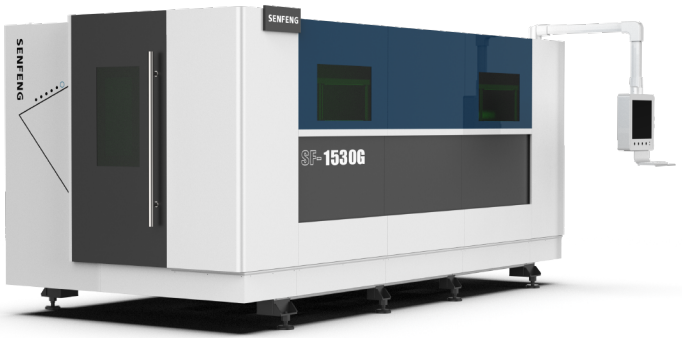

Model	1530G
Laser Power (kW)	1.5-6
Working Area (L*W, in)	118.1*59.1
X/Y-axis Positioning Accuracy (in)	±0.0020
X/Y-axis Repositioning Accuracy (in)	±0.0008
Max No-load Speed (in/min)	3149.6
Max Acceleration (G)	0.8
Max Load of Platform (lb)	1543.2
Overall Dimensions (L*W*H, in)	192.5*90.6*90.2

(562) 319 8053 info@senfenglaserusa.com