SENFENG

www.senfenglaserusa.com

1313G

Laser power: **1.5-3kW**
Sheet thickness: **0.04-0.79 in**

- Cut thin sheets at high precision
- Fully-enclosed compact structure to prevent laser radiation and smoke pollution
- Single platform to be taken out sidewise, facilitating both loading & unloading
- Small in size and need much less oversea freights (one 20GP container)
- Provide suction-cup loading cantilever (optional) to reduce manual handling

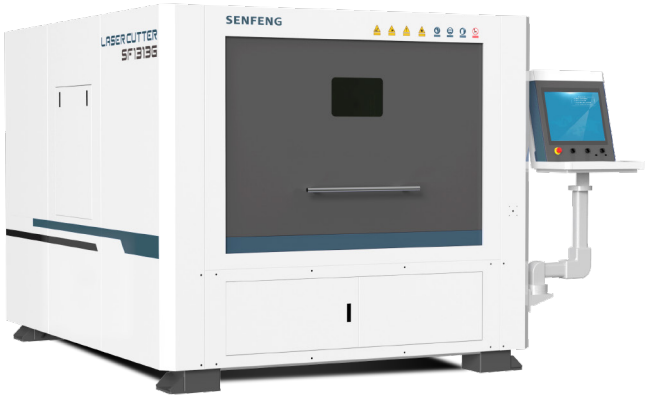

Model	1313G
Laser Power (kW)	1.5-3
Working Area (L*W, in)	51.2*51.2
X/Y-axis Positioning Accuracy (in)	±0.0020
X/Y-axis Repositioning Accuracy (in)	±0.0008
Max No-load Speed (in/min)	3149.6
Max Acceleration (G)	0.8
45° Beveling	No
Number of Platform	1
Max Load of Platform (lb)	485
Overall Dimensions (L*W*H, in)	117.5*85.0*78.7

(562) 319 8053 info@senfenglaserusa.com