SENFENG

www.senfenglaserusa.com

1530N

Laser power: **1.5-12kW**
Sheet thickness: **0.04-0.79 in**

- Cut thin sheets at fast speed and high precision
- Offer top cover to form protective chamber and prevent laser radiation
- Compact in structure, for easy oversea transport only by using a 20GP or 40GP container
- Sidewise pull-push platform with new leg supports and electric cylinder to eliminate the need for manual pulling and make it convenient for users to load and unload sheets
- Dual exhaust ducts and follow-up dampers available to speed up air ventilation and optimize smoke exhaust effects

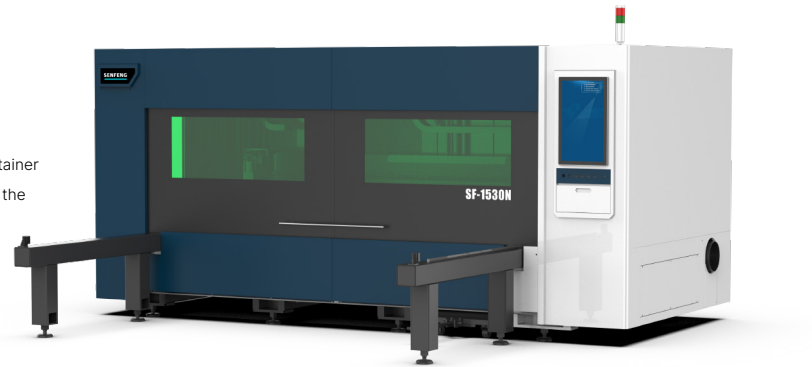

Model	1530N
Laser Power (kW)	1.5-12
Working Area (L*W, in)	122*61
X/Y-axis Positioning Accuracy (in)	±0.0020
X/Y-axis Repositioning Accuracy (in)	±0.0008
Max No-load Speed (in/min)	3937
45° Beveling	No
Number of Platform	1
Max Load of Platform (lb)	2425.1
Overall Dimensions (L*W*H, in)	190.7*158.7*81.7

(562) 319 8053 info@senfenglaserusa.com